

Wall mounted unit

ATXTP-K + ARXTP-N



Siesta



Guaranteed operation down to -25°C



Energy saving during standby mode




Online controller via app

Wall mounted unit providing high efficiency and comfort

- › Guaranteed heating capacity down to -25°C
- › Ideal for above door installation
- › Full range A++
- › Online controller (optional)
- › Space saving contemporary wall mounted design
- › Bluevolution range: lower environmental impact


ATXTP-K + ARXTP-N

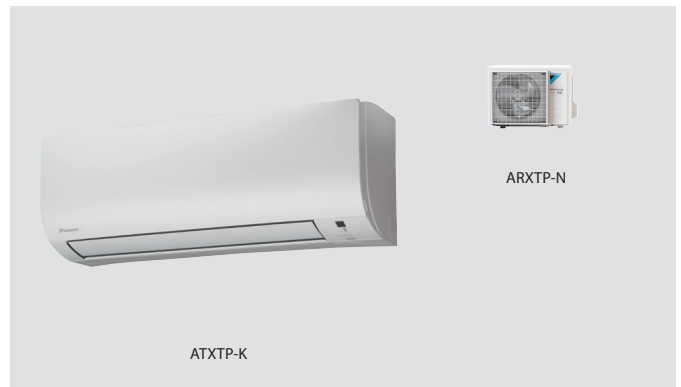

Efficiency data		ATXTP + ARXTP	25K + 25N	35K + 35N	
Cooling capacity	Min./Nom./Max.	kW	0.70/2.50/4.00	0.70/3.50/4.40	
Heating capacity	Min./Nom./Max.	kW	0.80/3.20/6.00	0.80/4.00/6.50	
Power input	Cooling	Nom.	0.57	0.91	
	Heating	Nom.	0.68	0.87	
Space cooling	Energy efficiency class		A++		
	Capacity	Pdesign	kW	2.50	3.50
	SEER			6.98	7.05
	Annual energy consumption		kWh/a	125	174
Space heating (Average climate)	Energy efficiency class		A++		
	Capacity	Pdesign	kW	2.50	3.00
	SCOP/A			4.93	4.76
	Annual energy consumption		kWh/a	710	883
Space heating (Cold climate)	Energy efficiency class		A		
	Capacity	Pdesignh	kW	3.70	4.40
	Annual energy consumption		kWh/a	1,955	2,455
	SCOP/C			3.92	3.76
Nominal efficiency	EER		4.38	3.75	
	COP		4.90	4.39	
	Annual energy consumption		kWh	286	467
	Energy labeling Directive	Cooling/Heating		A/A	

Indoor unit		ATXTP	25K	35K
Dimensions	Unit	HeightxWidthxDepth	mm	
			285x770x225	
Weight	Unit		kg	
			9.00	
Air filter	Type		Removable / washable	
Fan	Air flow rate	Cooling	m ³ /min	
		Heating	m ³ /min	
		Silent operation/Low/	4.30/5.30/7.7 /10.60	
		Silent operation/Low/	4.90/5.80/8.0 /11.20	
Sound power level	Cooling		dBA	
	Heating		dBA	
			58	
Sound pressure level	Cooling	Silent operation/Low/High	dBA	
	Heating	Silent operation/Low/High	dBA	
			21/26/43	
Control systems	Infrared remote control		ARC480A11	
	Wired remote control		BRC944B2 / BRC073A1	
Power supply	Phase/Frequency/Voltage		Hz/V	
			1~/50/220-240	

Outdoor unit		ARXTP	25N	35N
Dimensions	Unit	HeightxWidthxDepth	mm	
			551x763x312	
Weight	Unit		kg	
			38	
Sound power level	Cooling		dBA	
	Heating		dBA	
			61	
Sound pressure level	Cooling	Nom.	dBA	
	Heating	Nom.	dBA	
			48	
Operation range	Cooling	Ambient	Min.~Max.	°CDB
	Heating	Ambient	Min.~Max.	°CWB
			-10~-46	
			-25~-18	
Refrigerant	Type		R-32	
	GWP		675	
	Charge		kg/TCO ₂ Eq	
			1.10/-	
Piping connections	Liquid	OD	mm	
	Gas	OD	mm	
	Piping length	OU - IU	Max.	m
	Additional refrigerant charge			kg/m
	Level difference	IU - OU	Max.	m
			0.02 (for piping length exceeding 10m)	
			15	
Power supply	Phase/Frequency/Voltage		Hz/V	
			1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	
			-	



08/2018

