

## 2-way blow ceiling mounted cassette

FXCQ-A




Whisper quiet

Thin, lightweight design installs easily in narrow ceiling spaces

- › Depth of all units is 620mm, ideal for narrow ceiling spaces
- › Refurbishing the room? Flexibility to suit every room layout without changing the location of the unit! Via the wired remote controller you can easily control each flap individually and even close the flaps.
- › Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- › Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating
- › Optimum comfort guaranteed with automatic air flow adjustment to the required load


# FXCQ-A

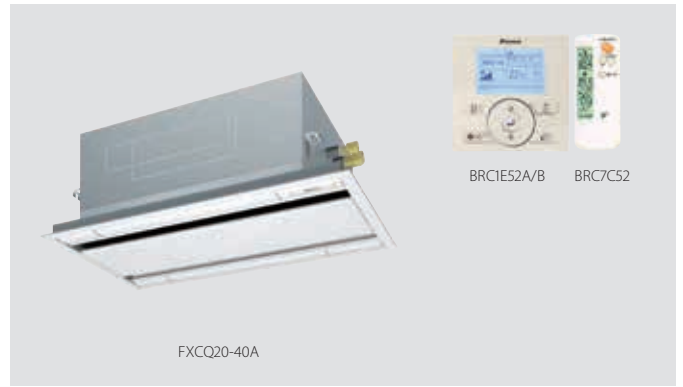

Indoor unit		FXCQ	20A	25A	32A	40A	50A	63A	80A	125A		
Cooling capacity	Nom.	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	14.0		
Heating capacity	Nom.	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	16.0		
Power input - 50Hz	Cooling	Nom.	kW	0.031	0.039	0.041	0.059	0.063	0.090	0.149		
	Heating	Nom.	kW	0.028	0.035	0.037	0.056	0.060	0.086	0.146		
Dimensions	Unit	Height	mm	305								
		Width	mm	775		990			1,445			
		Depth	mm	620								
Weight	Unit		kg	19		22	25	33	38			
Casing	Material	Galvanised steel plate										
Decoration panel	Model	BYBCQ40HW1			BYBCQ63HW1			BYBCQ125HW1				
	Colour	Fresh white (6.5Y 9.5/0.5)										
	Dimensions	HeightxWidthxDepth	mm	55x1,070x700			55x1,285x700			55x1,740x700		
	Weight		kg	10			11			13		
Fan-Air flow rate - 50Hz	Cooling	High/Nom./Low	m³/min	10.5/9/7.5	11.5/9.5/8	12/10.5/8.5	15/13/10.5	16/14/11.5	26/22.5/18.5	32/27.5/22.5		
Air filter	Type	Resin net with mold resistance										
Sound power level	Cooling	Nom.	dB(A)	-								
Sound pressure level	Cooling	High/Nom./Low	dB(A)	32.0/30.0/28.0	34.0/31.0/29.0	34.0/32.0/30.0	36.0/33.0/31.0	37.0/35.0/31.0	39.0/37.0/32.0	42.0/38.0/33.0	46.0/42.0/38.0	
	Heating	High/Nom./Low	dB(A)	32.0/30.0/28.0	34.0/31.0/29.0	34.0/32.0/30.0	36.0/33.0/31.0	37.0/35.0/31.0	39.0/37.0/32.0	42.0/38.0/33.0	46.0/42.0/38.0	
Refrigerant	Type/ GWP	R-410A/ 2.087,5										
Piping connections	Liquid	OD	mm	6.35			9.52					
	Gas	OD	mm	12.7			15.9					
	Drain			VP25 (O.D. 32 / I.D. 25)								
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240									
Current - 50Hz	Maximum fuse amps (MFA)	A	16									
Control systems	Infrared remote control	BRC7C52										
	Simplified wired remote control for hotel applications	-										
	Wired remote control	BRC1D52 / BRC1E52A/B										

Contains fluorinated greenhouse gases

**Daikin Europe N.V.** Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN15-240

02/15



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.